



Certificate of Conformance to Requirements for Welding Electrode

Product Type: FabCO 85
Classification: E70T-5CJ H4; E70T-5MJ H4
Specifications: AWS A5.20/A5.20M; ASME SFA 5.20
Diameter Tested: 1/16"; 3/32"
Date Tested: 8/18/2020
Date Generated: 9/30/2020

This is to certify that the product named above and supplied on the referenced order number is of the same classification, manufacturing process, and material requirements as the material which was used for the test that was concluded on the date shown, the results of which are shown below. All tests required by the specifications shown for classification were performed at that time and the material tested met all requirements. It was manufactured and supplied by the Quality System Program of Hobart Brothers, which meets the requirements of ISO 9001, ANSI/AWS A5.01, and other specification and Military requirements, as applicable. This document supplies actual test results of non-specific inspection in conformance with the requirements of EN 10204, type 2.2 certification.

THE STEEL USED IN THIS LOT OF MATERIAL WAS MELTED AND MANUFACTURED IN THE U.S.A.

Test Settings

Shielding Medium	Amps / Polarity	Volts	WFS in/min(m/min)	ESO in(mm)	Preheat F(C)	Interpass F(C)	Travel Speed in/min(cm/min)
M21-ArC-25	360 / DCEP	28	340 (8.6)	5/8 (16)	300(149)	300(149)	14.9 (37.8)
C1 (100% CO2)	375 / DCEP	29	375 (9.5)	.75 (19)	Room Temp	300(149)	12 (30.5)
M21-ArC-25	425 / DCEP	26	165 (4.2)	1 (25)	Room Temp	300(149)	10 (25.4)
C1 (100% CO2)	425 / DCEP	27	165 (4.2)	1 (25)	Room Temp	300(149)	10 (25.4)

Mechanical Properties - Tensile

Shielding Medium	Ref. No.	Testing Conditions	Ult. Tensile Strength psi (MPa)	Yield Strength psi (MPa)	Elong.% in 2"
C1 (100% CO2)	PE1029	Aged 48 Hrs 220F	86,000 (595)	73,000 (506)	29
M21-ArC-25	PD9440	Aged 48 Hrs 220F	88,000 (605)	77,000 (530)	26
M21-ArC-25	PE1074	Aged 48 Hrs 220F	76,000 (523)	62,000 (425)	30
C1 (100% CO2)	PE1076	Aged 48 Hrs 220F	72,000 (499)	59,000 (404)	30

Mechanical Properties - Impact

Shielding Medium	Ref. No.	Testing Conditions	Temp. F (C)	Individuals ft.lb.(J)	Avg. ft.lb.(J)	Type
M21-ArC-25	PD9440	As Welded	-40 (-40)	60,63,45 (81,85,61)	56 (76)	Charpy-V-Notch
C1 (100% CO2)	PE1029	As Welded	-40 (-40)	82,78,75 (111,106,102)	78 (106)	Charpy-V-Notch
M21-ArC-25	PE1074	As Welded	-40 (-40)	74,100,90 (100,136,122)	88 (119)	Charpy-V-Notch
C1 (100% CO2)	PE1076	As Welded	-40 (-40)	107,118,117 (145,160,159)	114 (155)	Charpy-V-Notch

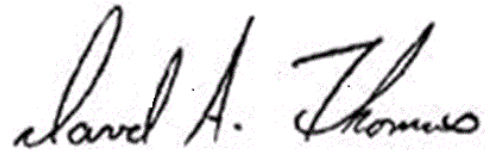
Ref.No.	Radiographic Inspection	Fillet Weld Test					
PE1029	Conforms	Horizontal :	Conforms	Overhead :	Vertical :		
PD9440	Conforms	Horizontal :	Conforms	Overhead :	Vertical :		
PE1074	Conforms	Horizontal :	Conforms	Overhead :	Vertical :		
PE1076	Conforms	Horizontal :	Conforms	Overhead :	Vertical :		

Chemical Analysis

Shielding Medium / Ref. No	C	Mn	P	S	Si	Cu	Cr	V	Ni	Mo	Al	Ti	Nb	Co	B	W	Sn	Fe	Sb	N	Mg	Zn	Be	Sb	As
M21-ArC-25 / PD9440	0.08	1.24	0.006	0.008	0.71	0.04	0.05	0.01	0.02	0.01	0.01	0.03	< .01												
C1 (100% CO2) / PE1029	0.06	1.42	0.007	0.008	0.84	0.04	0.05	0.01	0.02	0.01	0.01	0.03	< .01												
M21-ArC-25 / PE1074	0.10	1.22	0.012	0.011	0.51	0.05	0.03	0.01	0.02	0.01	0.01		< .01												
C1 (100% CO2) / PE1076	0.07	1.06	0.009	0.008	0.39	0.06	0.04	< .01	0.03	0.01	< .01		< .01												

Diffusible Hydrogen Collected per AWS A4.3

M21-ArC-25	2.6 ml/100g of weld metal for 3/32 in diameter 50% relative humidity
C1 (100% CO2)	1.8 ml/100g of weld metal for 3/32 in diameter 50% relative humidity
C1 (100% CO2)	2.4 ml/100g of weld metal for 1/16 in diameter 40% relative humidity
M21-ArC-25	3.1 ml/100g of weld metal for 1/16 in diameter 40% relative humidity

A handwritten signature in black ink that reads "David A. Thomas". The signature is written in a cursive style with a large initial 'D' and 'T'.

Dave Thomas, Quality Assurance Rep.

Certification and Limited Warranty - Data for the above supplied product are those obtained when welded and tested in accordance with the above specification. All tests for the above classification were satisfied. Other tests and procedures may produce different results.