

# COMPACT BEVELING TOOL ACCESSORIES



(DCMT II T 304)  
P/N: 623560000 - 45°

## Indexable Carbide Inserts

- Constructed of long life tungsten carbide
- Chamfer and radius versions
- Pack of 10



P/N: R2 (5/64"): 623561000  
P/N: R3 (1/8"): 623562000



P/N: 623566000


## Replacement Insert Screws

- Pack of 10

## VARIOUS APPLICATION AREAS

### Possible cutting shapes

Radii  
5/64" / 1/8"




### Possible edges/contours for compact beveling tools


**Chamfer or radius straight edges**  
Using cutting guide  
(min. thickness: 23 gauge)




**Inside/outside curves**  
Chamfer or radius with guide bearing  
(min. thickness: 23 gauge)




**Inside holes/curves**  
Chamfer or radius internal holes with guide bearing  
(min. diameter 1/2")



## HIGH SURFACE QUALITY = PRECISE WORK RESULTS

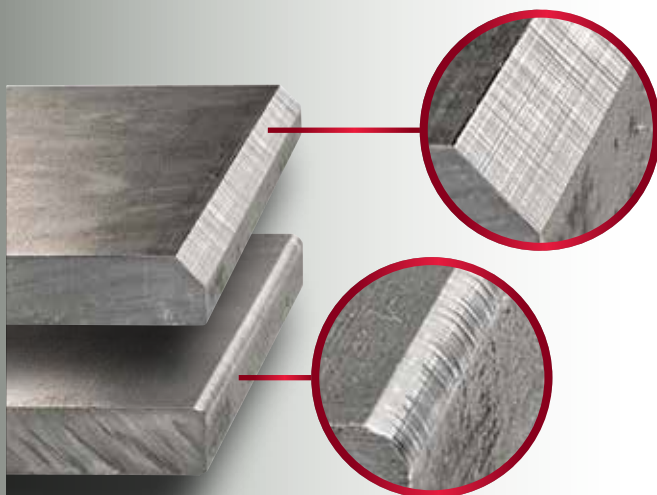

With angle grinder

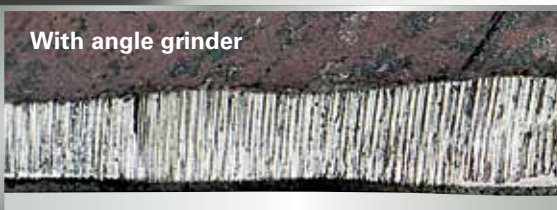

- Uniform surfaces for highest weld quality
- Edge breaking/deburring of sheet metal
- Perfect radii of edges for optimal paint/coating preparation

### Optimal paint/powder coating preparation

#### Processing of edges:

- Perfectly rounded edges
- Uniform coating thickness  
→ best protection from corrosion



#### Without edge processing:

- Increased risk of corrosion at corners

