


DINSE 25M / 35M

These are the industry standard gas-thru Dinse 25 and Dinse 35 used to connect TIG torches to your welding machine dependent on its functionality and the torch you are using. Refer to the charts below for the proper connector to match your machines setup.

Note: These connectors are for gas-thru dinse style machines—if you have any questions regarding which connector to purchase please call or email us for help.




DINSE 25M | DINSE 35M | LINCOLN | MILLER

LINCOLN						MILLER					
SQUAREWAVE	TIG 175	35M	INVERTEC	V160T	35M	SYNCROWAVE	180SD	35M	MAXSTAR	150STL	25M
	TIG 185	35M		V205T	35M		200	35M		150STH	35M
	TIG 200	35M		V311T	35M		210	35M			
	TIG 275	35M									
ASPECT	300/375	35M	PRECISION	TIG 225	35M	ECONOTIG	35M				

DINSE 25M | GAS COOLED 3/8-INCH | 9.5MM

TORCHES	ORDER #
CK24, 80, 90, 100	SL2-25M-24
CK9, 17, 130, 150, FL130, FL150, MR70	SL2-25M
MT100, CKC150, CK210, TL210, CKA16	SL5-25M
CK26, TL26	SL8-25M

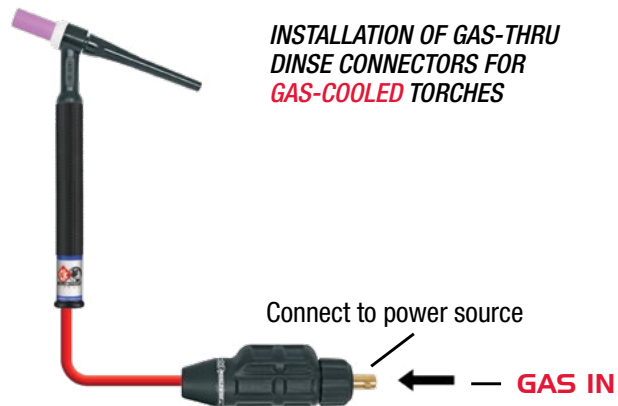


DINSE 35M | GAS COOLED 1/2-INCH | 12.8MM

TORCHES	ORDER #
CK24, 80, 90, 100	SL2-35M-24
CK9, 17, 130, 150, FL130, FL150, MR70	SL2-35M
MT100, CKC150, CK210, TL210, CKA16	SL5-35M
CK26, TL26	SL8-35M

DINSE 25M | WATER COOLED 3/8-INCH | 9.5MM

TORCHES	ORDER #
CK18, 20, 24W, 25, 180, 200	SLWHAT-25M
CKT200, CK230, CK300, TL300	
CK510, CK24W, FL230, FL250	
MR140, MT400, MT500	

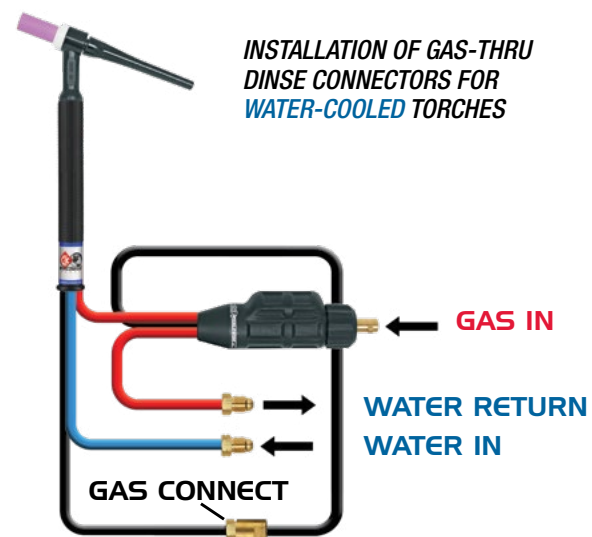

DINSE 35M | WATER COOLED 1/2-INCH | 12.8MM

TORCHES	ORDER #
CK18, 20, 24W, 25, 180, 200	SLWHAT-35M
CKT200, CK230, CK300, TL300	
CK510, CK24W, FL230, FL250	
MR140, MT400, MT500	

