



SAFE-LOC CONNECTOR

EXTERNAL GAS CONNECTION

FOR USE ON MT100, CKC150, CK210, TL210, CKA16


SL5-25



TYPICAL GAS HOSE CONNECTION 5/8" -18 tpi Male Connection
(THIS DOES NOT COME WITH SL5-25)



EXISTING POWER CABLE FROM THE TIG TORCH. IT CAN BE RED OR BLACK WITH A 5/8" DIAMETER EXTERNAL THREAD ON THE END

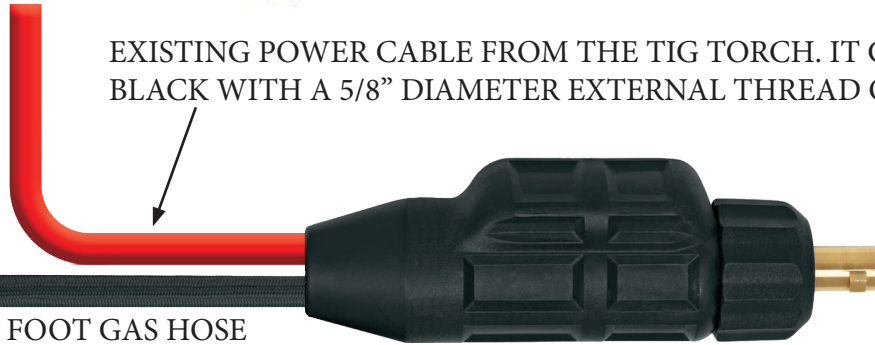

6 FOOT GAS HOSE

"B" FITTING EXTERNAL GAS CONNECTION TO SUPPLY ARGON TO THE TIG TORCH

AW-430 "B" COUPLING IF REQUIRED



THE SL5-25 IS AN EXTERNAL GAS AND POWER CABLE CONNECTOR.

YOU NEED TO KNOW HOW THE GAS IS GOING TO GET TO THE TIG TORCH.

- DOES IT COME FROM THE REGULATOR TO THE TIG TORCH
- IS THERE A FEMALE THREADED CONNECTION ON THE WELDING MACHINE TO CONNECT THE SL5 "B" FITTING INTO
- THE SL5 ARGON HOSE IS 6 FEET LONG. IF YOUR GAS REGULATOR OR GAS SUPPLY TO THE TIG TORCH IS FURTHER, YOU MAY NEED A COUPLING AND ALSO A GAS HOSE EXTENSION